

▼ Shown: HF95T, HF95X, HF95Y



The Genuine Range

Hydraulic Oil


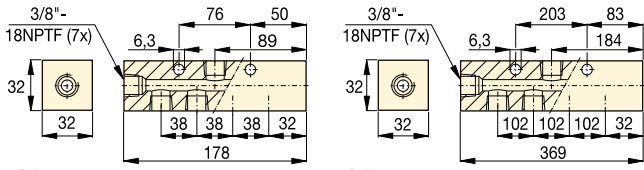

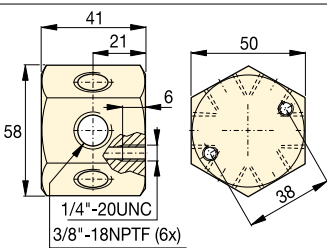

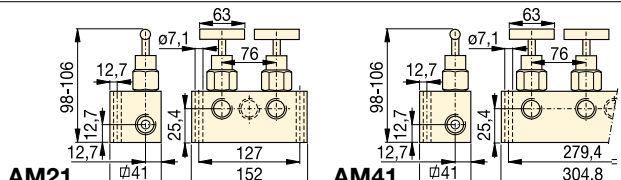
Contents	Model Number	Use only genuine Enerpac Hydraulic Oil. The use of any other fluid will render your Enerpac warranty null and void.
1 litre	HF95X	
5 litres	HF95Y	
20 litres	HF95T	

▼ OIL SPECIFICATION CHART

Viscosity Index	100 min
Viscosity (cSt @ 40 °C)	32
API Gravity	31-33
Density (cSt @ 15 °C)	875
Flash point	204 °C
Pour point	-32 °C
Colour	Blue
Working Temperature Range	0 - 60 °C
Ideal working temperature	40 °C

- Maximum pump volumetric efficiency
- Maximum internal heat transfer
- Prevents pump cavitation
- Additives prevent rust, oxidation and sludge
- High viscosity index
- Maximum film protective lubricity.

700 bar Manifolds

Description		Model Number	Dimensions (mm)
7-port Manifold, short		A64	
7-port Manifold, long allows direct mounting of control valves to the manifold.		A65	
6-port Manifold, hexagon Plugs furnished for all ports 3/8"-18 NPTF.		A66	
Control Manifolds * For control of two or four single-acting cylinders simultaneously. AM21 with 5 ports 3/8"NPTF. AM41 with 7 ports 3/8"NPTF.		AM21	
		AM41	

* See page 142 for AMGC-Series 4-way manifold assembly complete with gauges.