

Hydraulic Machine Lifts

▼ SOH-10-6



SOH Series

Lifting Capacity:
8,5 - 20 ton

Stroke:
136 - 157 mm

Toe Clearance:
20 mm

Maximum Operating Pressure:
700 bar



RSM Flat-Jac®

Low height, single acting spring-return cylinders are ideal for space restricted applications.

Page: 22




Load Skates

In combination with the Enerpac Machine Lifts we recommend Load Skates for moving heavy loads.

Page: 168

- For lifting heavy equipment with minimum available access
- Remote hydraulic pump enhances safety
- Low height lifting toe
- Precision guided to reduce friction and isolate cylinder from side-loads
- Two extendable support feet provide extra stability
- Includes RC-Series DUO Cylinder with CR-400 coupler.

▼ Limited access under this machine makes the Enerpac hydraulic machine lift the perfect solution.

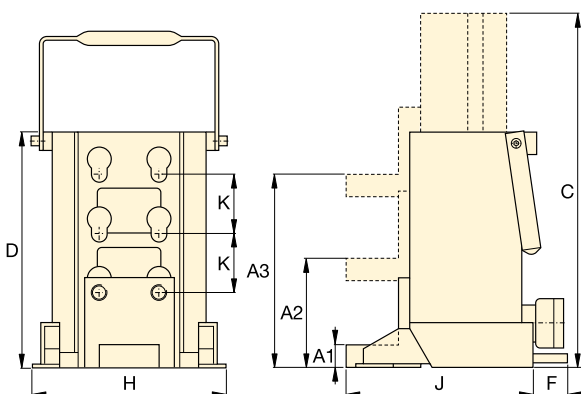

| Capacity | Toe Clearance (mm) | | | Stroke | Model Number | Oil Capacity | Dimensions (mm) | | | | | | 🏋️ (kg) |
|----------|--------------------|------------|------------|--------|--------------|--------------|---------------------|---------------------|----|-----|-----|----|---------|
| | Minimum A1 | Central A2 | Maximum A3 | | | | Total Ext. Height C | Total Body Height D | F | H | J | K | |
| 8,5 (75) | 20 | 95 | 169 | 136 | SOH-10-6 | 224 | 430 | 294 | - | 190 | 214 | 74 | 26 |
| 20 (178) | 30 | 110 | 190 | 157 | SOH-23-6 | 525 | 472 | 320 | 65 | 265 | 250 | 80 | 45 |